

Initial Evaluation of ZigLoc: Anchor-Free Sensor Localization System using WiFi Fingerprints

Shigemi Ishida¹

Kousaku Izumi¹

Takahiro Yamamoto¹

Shigeaki Tagashira²

Akira Fukuda¹

¹EECS/ISEE, Kyushu University, Japan

²Faculty of Informatics, Kansai University, Japan

{ishida,kousaku,yamamoto,fukuda}@f.ait.kyushu-u.ac.jp

shige@res.kutc.kansai-u.ac.jp

1. INTRODUCTION

Sensor network plays an important role to retrieve environmental information for IoT (Internet of Things). To minimize deployment cost of large scale indoor sensor networks, we are developing *ZigLoc*, a sensor localization system that requires no anchor deployment. In *ZigLoc*, sensor location is estimated using WiFi fingerprints, which are collected for a WiFi localization system. This paper briefly describes concepts of *ZigLoc* as well as our previous works for *ZigLoc*, and reports an initial experimental result.

2. ZIGLOC

Figure 1 depicts an overview of *ZigLoc*. WiFi APs are sending periodic beacon signals. Sensor nodes detect the beacon signals from multiple APs and measure their RSS (received signal strength) to generate an RSS vector, which is sent to a localization server. The localization server then performs fingerprinting localization [3] with the RSS vector. The localization server looks up three fingerprints nearest to the RSS vector from a WiFi fingerprint database and calculates a weighted average of the fingerprint locations to estimate sensor location.

Sensor nodes are equipped with ZigBee (IEEE 802.15.4) modules and cannot demodulate WiFi (IEEE 802.11) signals. We therefore developed a cross-technology signal extraction scheme. We have reported a WiFi AP-RSS monitor with AP recognition for sensor nodes [2]. WiFi operating channel estimator have also been developed [1] because APs automatically select their operating channels.

3. INITIAL EVALUATION

We conducted experiments to evaluate the basic performance of *ZigLoc*. Figure 2 depicts an experiment setup. We installed eight WNDR4300 APs from Netgear Inc. in our

laboratory and collected location fingerprints using a WiFi module on MacBook Air in a $4 \times 9 \text{ m}^2$ localization area with 1-meter grid spacing. We then put a sensor node at eight locations in the localization area and collected AP-RSS for one minute to estimate sensor location. *ZigLoc* localization was performed for 15 times at the each sensor location. As a comparison, the location of a WiFi device, which was put right beside the sensor node, was also estimated by WiFi fingerprinting localization.

Figure 3 shows ECDF (empirical cumulative distribution function) of localization errors for *ZigLoc* and WiFi localizations. *ZigLoc* and WiFi localization achieved accuracies of 7.40 m and 2.61 m respectively for 90% of localizations. Currently, *ZigLoc* exhibited a low localization accuracy for practical use. The low accuracy was mainly caused by an offset between RSS derived by sensor nodes and by WiFi module due to bandwidth difference and antenna gain. We are now working on accuracy improvement.

4. ACKNOWLEDGMENTS

This work was supported in part by JSPS KAKENHI Grant Numbers 15H05708, 15K12021, 16K16048, and the Cooperative Research Project of the Research Institute of Electrical Communication, Tohoku University.

5. REFERENCES

- [1] S. Ishida et al. Design of WiFi-AP operating channel estimation scheme for sensor node. In *Proc. ICMU*, pages 13–18, Oct. 2016.
- [2] K. Izumi et al. Design of WiFi AP-RSS monitoring system using sensor nodes. In *Proc. CANDAR*, pages 115–121, Dec. 2015.
- [3] K. Kaemarungsi et al. Modeling of indoor positioning systems based on location fingerprinting. In *Proc. IEEE INFOCOM*, pages 1012–1022, Mar. 2004.

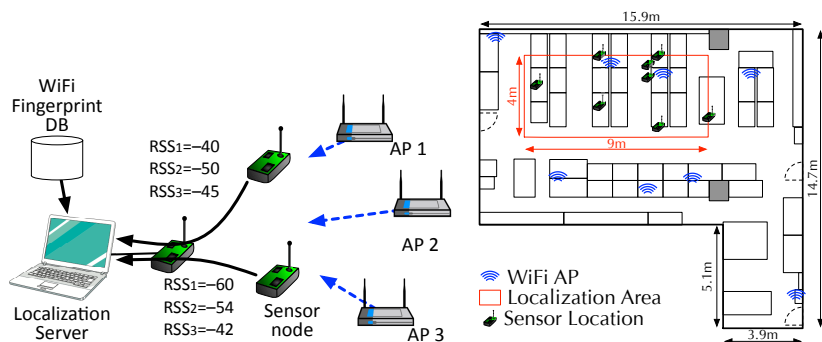


Figure 1: Overview of *ZigLoc*

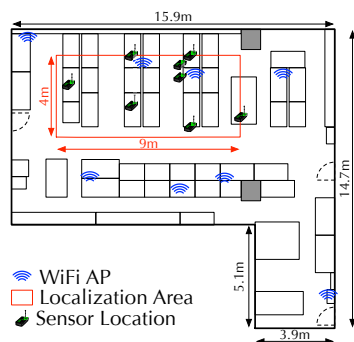


Figure 2: Experiment setup

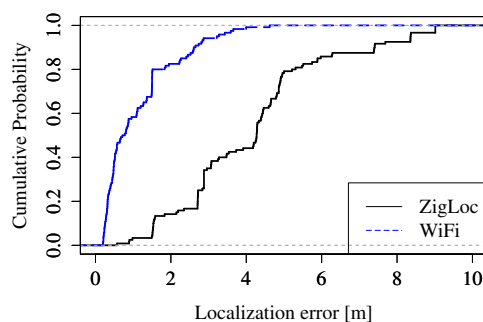


Figure 3: ECDF of localization error